
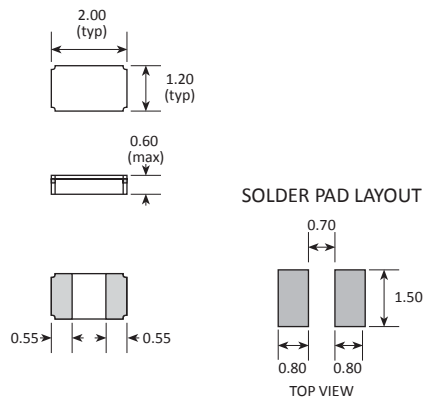


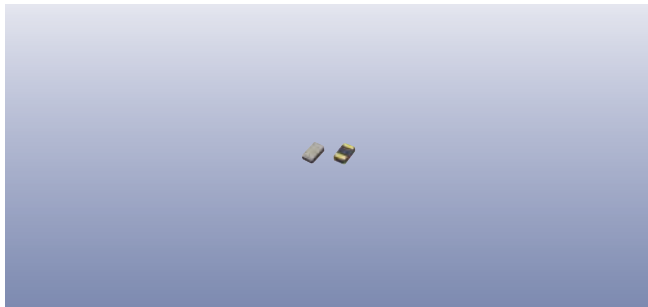

Features

- ▶ Ultra low profile - 0.6mm high
- ▶ High shock & vibration resistance
- ▶ Extended temperature range option
- ▶ AEC-Q200 Automotive option
- ▶ Low power consumption

Specifications

Parameters	Product CM8V	Option Code
Terminations: Gold plated pads	■	T1A
Frequency range: 32.768kHz	■	
Calibration tolerance: ±20ppm ±100ppm	■ □	specify
Operating temperature range: -40 to +85°C -40 to +125°C	■ □	E
Storage temperature range: -55 to +125°C	■	
Circuit condition: 4pF 6pF 7pF 9pF 12.5pF	□ □ □ □ ■	specify specify specify specify
Static capacitance (C_0): 1.1pF typ	■	
Motional capacitance (C_1): 3.7fF typ	■	
Equivalent series resistance: 55kΩ typ, 75kΩ max	■	
Ageing: ±3ppm max first year	■	
Drive level: 0.5μW max	■	
Turnover temperature (T_0): +25°C ±5°C	■	
Frequency / temp coefficient: -0.035ppm/°C² typ	■	
Shock resistance: ±5ppm, 5,000g, 0.3ms, ½ sine	■	
Vibration resistance: ±5ppm, 20g, 10.0 ~ 2,000Hz	■	
Soldering condition: Reflow, 260°C, 20 sec max	■	
Qualification: Commercial AEC-Q200 (Automotive)	■ □	A

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + termination + option codes (if any) + frequency + calibration tolerance + circuit condition

eg: CM8V-T1A 32.768kHz ±20ppm 12.5pF -40+85°C

CM8V-T1A/EA 32.768kHz ±100ppm 9pF -40+125°C, AEC-Q200

Option code X (eg CM8V-T1A/X) denotes a custom spec.

- ◆ Available on T&R 1k, 3k or 14k pcs/reel.
- ◆ Refer to our website for T&R and soldering details.
- ◆ Ask about higher shock & vibration specifications.